



RECESSED EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m




RECESSED

track 48V | 15A | DALI

28-30 5-25 SELV

Length	CODE
1.0m	90014187
1.0m	90014188
2.0m	90014189
2.0m	90014190
3.0m	90014191
3.0m	90014192




A | MOUNTING BRACKET

recessed mounting bracket

CODE
90014193

for 1.0m - 2pcs needed
for 2.0m - 4pcs needed
for 3.0m - 6pcs needed




F | POWER SUPPLY

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

Power	CODE
100W 48V	90218901
150W 48V	90218902


for DALI SELV solution on page 699



B | POWER FEED

48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²

CODE
90014153
90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

CODE
90014196
90014197

WIRELESS CONTROL

2400-2483.5MHz | adapter for DALI
wireless management

CODE
90014194
90014195






D | END CAP

CODE
90014149
90014150



SURFACE EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m

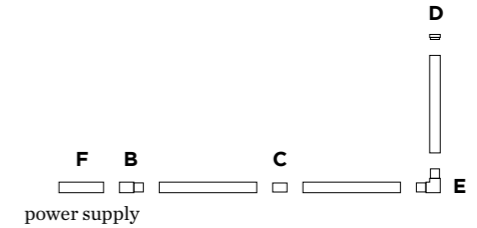


SURFACE

track 48V | 15A | DALI


SELV

	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186



F | POWER SUPPLY

profile converter box incl. PS
220-240VAC | 50-60Hz
48V | incl. DALI through wiring
for connection to power feed




	CODE
100W	90014166
100W	90014167
150W	90014170
150W	90014171

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed

	CODE
100W 48V	90218901
150W 48V	90218902

for DALI SELV solution on page 699



B | POWER FEED


48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²

	CODE
	90014153
	90014154



D | END CAP


	CODE
	90014147
	90014148



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector


	CODE
	90014196
	90014197



E | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
	90014199



WIRELESS CONTROL



2400-2483.5mHz | adapter for DALI
wireless management

	CODE
	90014194
	90014195



SUSPENDED EXAMPLES

for more support, extended layout or other lengths of 48V systems, please check our FAQ section on weverducre.com/faq
max. system length per power supply 15.0m

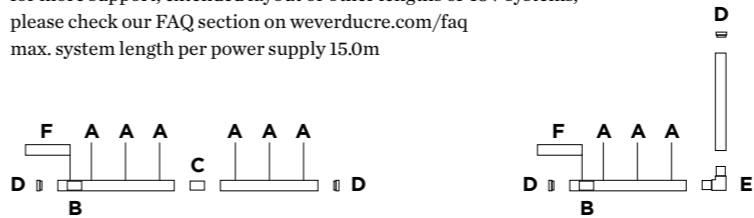


SUSPENDED

track 48V | 15A | DALI

SELV

	CODE
1.0m	90014181
1.0m	90014182
2.0m	90014183
2.0m	90014184
3.0m	90014185
3.0m	90014186




SUSP. INDIRECT LIGHT

track 48V | 15A | DALI
with indirect light

SELV

	CODE
2.0m	900140W_
2.0m	900140B_
LIGHT COLOUR	LUMEN CRI
3000K 18.5W	1100 >90
3.0m	900141W_
3.0m	900141B_

	CODE
LIGHT COLOUR	LUMEN CRI
3000K 29W	1650 >90
	5




A | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


	CODE
1.5m	90014160
3.0m	90014161

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed




F | POWER SUPPLY

ceiling base incl. power supply
220-240VAC | 50-60Hz | 48V
incl. DALI through wiring
for connection to end feed



	CODE
100W	90014168
100W	90014169
150W	90014172
150W	90014173


for DALI SELV solution on page 699



B | POWER FEED

48V | 15A | DALI | end/middle power
feeder | max. 4 x 1.5mm²


	CODE
	90014153
	90014154



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197



WIRELESS CONTROL


2400-2483.5mHz | adapter for DALI
wireless management

	CODE
	90014194
	90014195



D | END CAP

	CODE
	90014147
	90014148



E | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014198
	90014199









1-PHASE TRACKS

220-240V TRACKS | ACCESSORIES

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

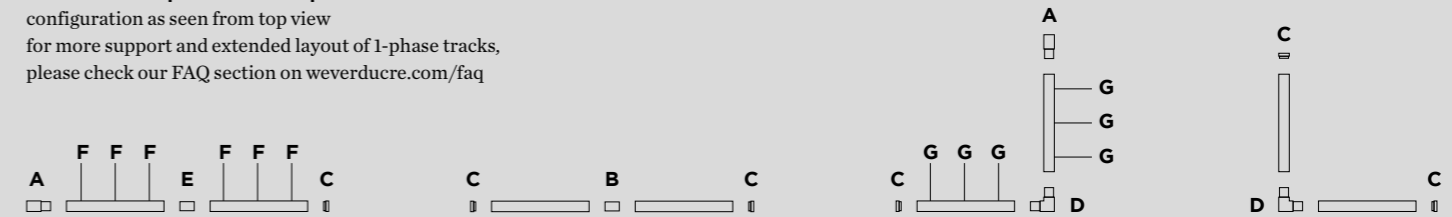

TRACK PROFILE

recessed | 220-240V | 16A



F | MOUNTING BRACKET

for recessed fixation

TRACK PROFILE

surface | suspended | 220-240V | 16A



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

A | END FEED

220-240V | max. 3 x 1.5mm² - 16A

left

	CODE
	90014018
	90014019

right

	CODE
	90014020
	90014021

D | L-CONNECTOR

can be used as feed
220-240V | max. 3 x 1.5mm² - 16A

left

	CODE
	90014024
	90014025

right

	CODE
	90014026
	90014027

B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037




E | CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023

C | END CAP LEFT/RIGHT

	CODE
	90014028
	90014029



COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125



more 1-phase track accessories on
page 710

3-PHASE TRACKS

220-240 VOLT TRACKS | ACCESSORIES

SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 3-phase tracks,
please check our FAQ section on weverducre.com/faq

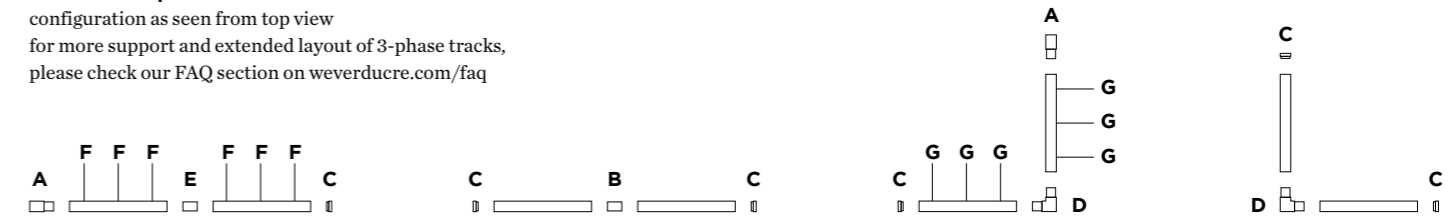

TRACK PROFILE

surface | suspended | 220-240V | 16A



	CODE
1.0m	90014200
1.0m	90014201
2.0m	90014202
2.0m	90014203
3.0m	90014204
3.0m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
1.5m	90014206
1.5m	90014207
3.0m	90014208
3.0m	90014209

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED


including cable gasket
220-240V | max. 5 x 1.5-2.5mm² | 16A

left

	CODE
90014238	
90014239	

right

	CODE
90014240	
90014241	



D | L-CONNECTOR


220-240V | max. 5 x 1.5-2.5mm² | 16A

left

	CODE
90014220	
90014221	


right

	CODE
90014222	
90014223	



TRACK COVER

	CODE
1.0m	90014236
1.0m	90014237



B | MIDDLE FEED

straight
220-240V | max. 5 x 1.5-2.5mm² | 16A


	CODE
90014224	
90014225	



C | END CAP LEFT/RIGHT

	CODE
90014216	
90014217	

more 3-phase track accessories on
page 711



E | STRAIGHT CONNECTOR

	CODE
90014226	
90014227	